MAVERICK
WHATS'S NEW

- Updated Dimensions Chart
- Lariat FWD is now Hybrid only
- Added Tremor Off-Road Package

INDEX

WHAT'S NEW _____ 1
INDEX _____ 2
INTRODUCTION _____ 3
MODEL LINEUP _____ 4
DIMENSIONAL DATA
SUPER CAB / CREW CAB _____ 5-6
PICKUP BOX _____ 7
DIMENSIONAL DATA _____ 8-9
AXLE / TIRE / VEHICLE HEIGHT DATA _____ 10
WHEEL & TIRE DATA _____ 11
ELECTRICAL ADAS FEATURES CAMERA _____ 12
REVISION TABLE _____ 13

WARNING:
During the product˙on and servicing of these vehicles, due care should be taken to avoid damaging of safety or emissions related systems such as the braking system, fuel lines, sensors, catalysts, etc. through contacting them while working on adjacent areas of the vehicle. Inadvertent damage can also occur due to adjacent welding/cutting operations, people standing near/on unprotected systems while performing other tasks.

MAVERICK
INTRODUCTION

Important Notices

The information described herein is believed to be correct at the time of publication, but accuracy cannot be guaranteed. Ford reserves the right to discontinue models or change specifications or designs at any time without notice and without incurring any obligation.

Representations regarding the compliance of any Ford-manufactured incomplete vehicle to any rule, regulation or standard issued pursuant to the National Traffic and Motor Vehicle Safety Act or the Canadian Motor Vehicle Safety Act are set forth only in the Incomplete Vehicle Manual (IVM) which accompanies each incomplete vehicle.

Regulations such as those issued by the Federal Highway Administration (FHA) or issued pursuant to the Occupational Safety and Health Act (OSHA), and/or state, provincial, and local laws and regulations may require installation of additional equipment for the particular use intended for the vehicle. It is the responsibility of the subsequent stage manufacturer or completed vehicle alterer and the vehicle purchaser to ascertain how the vehicle will ultimately be used, if FHA, OSHA or state provincial or local regulations apply and how the vehicle as completed will comply with those requirements. Nothing contained herein is to be construed as a representation that such equipment required for the particular use intended has been installed on the completed or incomplete vehicle.

Reference Information

Ford Body Builder Advisory Service Publications

This document is an example of a program-specific Body Builders Layout Book (BBLB) published by the Ford Body Builder Advisory Service (BBAS) team. Each Ford Commercial Truck vehicle line has a similar document that aims to provide detailed information which may be of interest to a subsequent-stage manufacturer or alterer.

The Ford Transit and Transit Connect also have a Body and Equipment Mounting Manual (BEMM), which is a comprehensive resource dedicated to body and equipment mounting information.

Yet another source of program-specific information are the “Vehicle Specification” documents available on the Ford BBAS website. Information typically found in these documents are: vehicle curb and accessory weights, vehicle dimensions, component descriptions, capacities, GAWRs, alternator output, powertrain output and gear ratios.

In addition to the program-specific documents, there are several Ford BBLB documents that contain general best practices or information on specific subjects that span multiple vehicle lines. These include:

- General BBLB - contains Definitions, Design Recommendations and Vehicle Storage Guidelines.
- Snow Plow BBLB
- Pickup Box Removal BBLB

These publications are updated every model year and can be accessed via the web at https://fordbbas.com under “Publications”. For BBLB and BEMM documents, expand the “Body Builder Layout Book” Section to view all available documents. For Vehicle Specifications, expand the “Vehicle Specifications” section. The website search function can be used to filter for specific content or vehicle line.

Ford Body Builder Advisory Service Bulletins

Occasionally, the Ford BBAS team will create an SVE “Bulletin” to address a specific issue or distribute important information in a timely manner. These documents can be accessed via the web at https://fordbbas.com under “Bulletins”. The website search function can be used to filter for specific content or vehicle line.

If applicable, information from each SVE bulletin will be incorporated into the appropriate BBLB document the following model year. In some cases, SVE bulletins will continue to be referenced in this document.

Ford Body Builder Advisory Service Contact

The Ford Truck Body Builder Advisory Service may be consulted if questions regarding the completion of Ford commercial vehicles are not adequately addressed in the documentation described above. For assistance call (877) 840-4338 or e-mail via the web at https://fordbbas.com under “Contact Us” and select “General Questions”.

For Ford vehicle CAD requests, please visit https://fordbbas.com, select “Contact Us” and then “CAD Request”.

For both Questions and CAD Requests, please be as specific as possible with the request details to assure the most accurate and timely response.

Ford Service Publications

Ford Service Technical Resources (including wiring diagrams, repair manuals and diagnostic tool support) are available by subscription via the Motorcraft website: www.motorcraftservice.com

The following publications are examples of digital and printed manuals which are available from Helm Incorporated; call 1-800-782-4356 or contact Helm, Inc. at their website www.helminc.com:

- Ford Truck Shop Manuals
- Ford Towing Manuals
- Ford Wiring Diagrams

MAVERICK
MODEL LINEUP
CREW CAB

	Vehicle Description	Eng	Trans	WB (in)	GVWR (lbs)	Max Advertised Payload	Base Curb Weight			GAWR				Axle Rating				Spring Rating Conventional				Air Max Rear	Max Total ARC	Max GCWR
							Front	Rear	Total	Min Front	Max Front	Min Rear	Max Rear	Min Front	Max Front	Min Rear	Max Rear	Min Front	Max Front	Min Rear	Max Rear			
	C2 Pickup 2.0L GTDI 8F35 / 8F35HD FWD TWB	2.0L	8F35 / 8F35HD	121.1	5080	1555	2125	1399	3525	2620	2620	2760	2760		2620		2760	4000	4000	5550	5550		431	7900
	C2 Pickup 2.0L GTDI 8F35/8F35HD AWD SLA	2.0L	8F35 / 8F35HD	121.1	5205	1512	2175	1518	3693	2685	2685	2770	2770		2685		2770	4000	4000	5550	5550		488	8145
	C2 Pickup 2.5L Atkinson FHEV HF45 FWD TWB	2.5L	HF45	121.1	5200	1564	2178	1458	3636	2680	2680	2765	2765		2680		2765	4000	4000	5550	5550		415	6010

Notes:
(1).Load rating represents maximum allowable weight of people,cargo and body equipment and is reduced by optional equipment weight
.
(2).ARC Weight is the maximum allowable weight of regular production options and aftermarket equipment (Accessory Reserve Capacity) above standard equipment for each configuration. Please also refer to footnote 5.

(3).Gross Axle Weight Rating is determined by the rated capacity of the minimum component of the axle system (axle, springs,wheels, tires) of a specific vehicle. Front and rear GAWRs will, in all cases, sum to a number equal to or greater than the GVWR for the particular vehicle. Maximum loaded vehicle (including passengers,equipment and payload) cannot exceed the GVW rating or GAWR (front or rear).

(4).Base Curb Weights shown above are for truck models with standard equipment. Please also refer to footnote 3.

MAVERICK
DIMENSIONAL DATA
CREW CAB

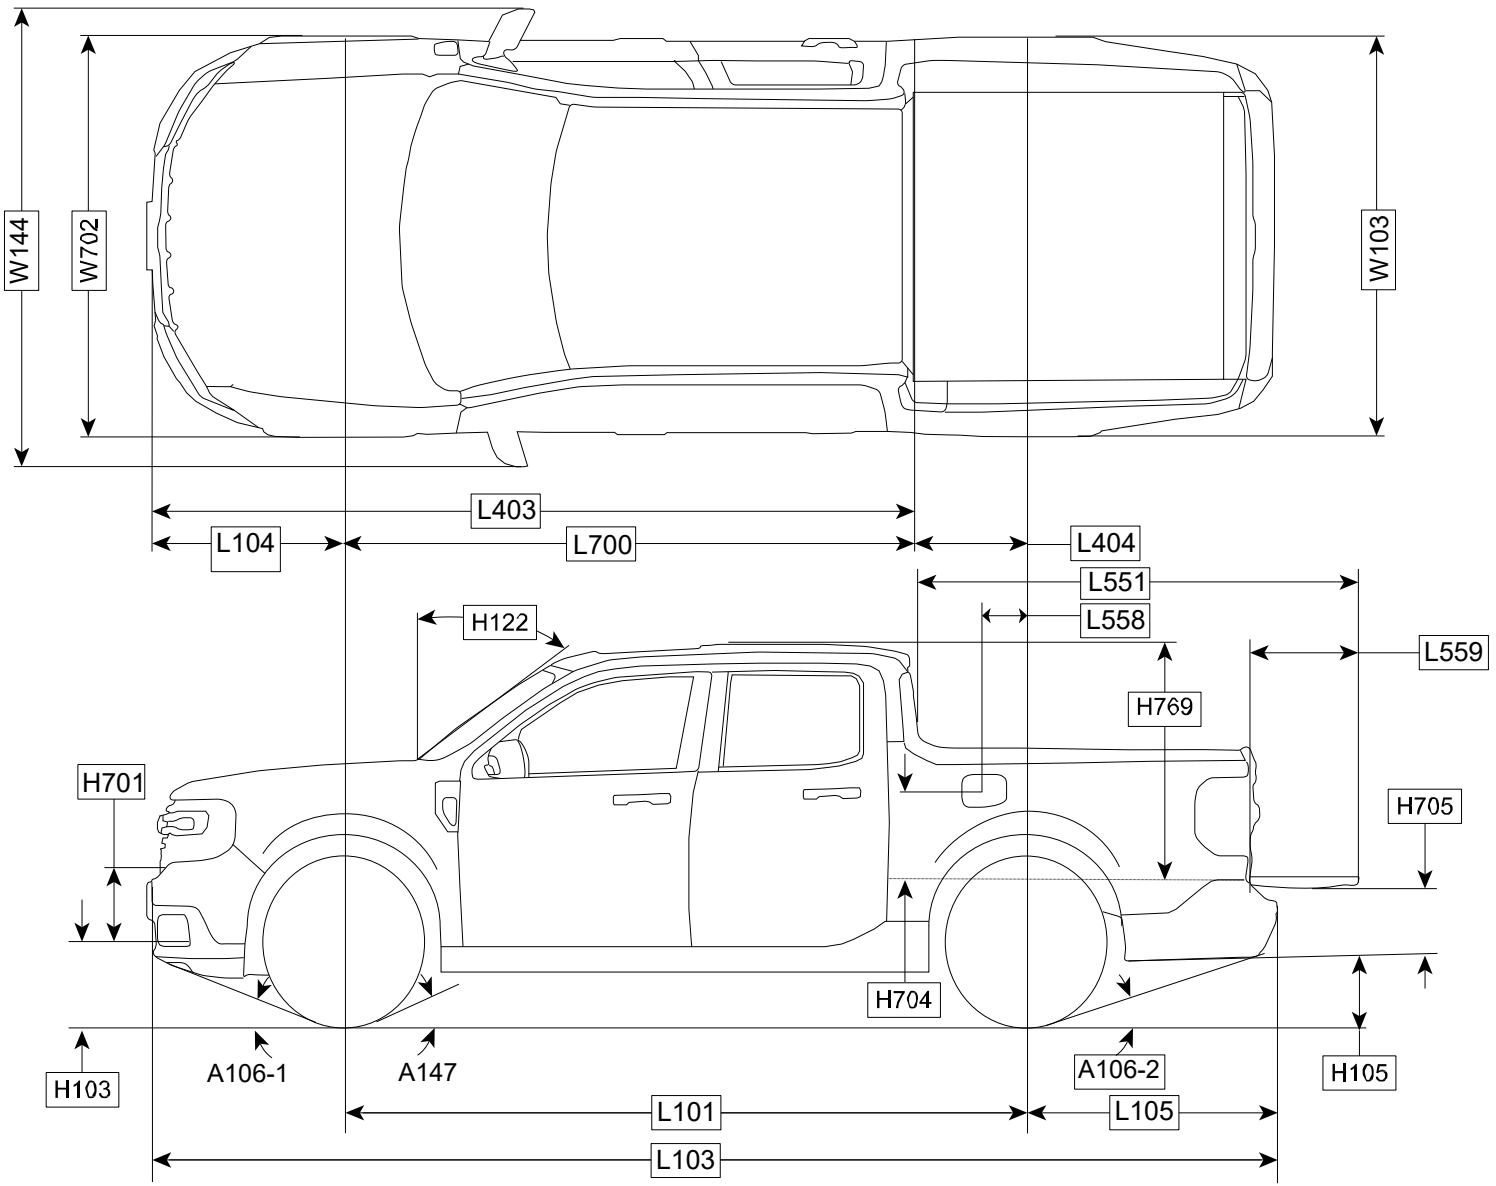

MAVERICK
DIMENSIONAL DATA
CREW CAB (CONT'D)

CHASSIS

CODE	DESCRIPTION	Crew Cab			
		Base FHEV	Full Content ICE		Tremor ICE
		225_65R17x7	225_65R17x7	225_65R17x7	235_65R17x7
		FWD	FWD	AWD	AWD
H103 (H103-1)	BOTTOM OF FRONT BUMPER VALANCE TO GROUND @ CURB (BASE TIRE)	214	215	218	244
H105 (H103-2)	BOTTOM OF REAR BUMPER VALANCE TO GROUND @ CURB (BASE TIRE)	361	366	349	377
A106-1	APPROACH ANGLE @ CURB (DEGREES)	20.6	20.7	21	30.7
A106-2	DEPARTURE ANGLE @ CURB (DEGREES) (TAKEN AT BOTTOM OF BUMPER)	219	22.2	20.8	22.2
A147	RAMP BREAKOVER ANGLE @ CURB (DEGREES)	16.6	18.3	17.5	19.9
L101	WHEELBASE	3076	3077	3077	3075
L103	VEHICLE LENGTH	5073	5073	5110	5099
L104	FRONT OVERHANG (NO LICENSE PLATE BRACKET)	866	866	890	878
L105	REAR OVERHANG	1131	1131	1144	1146
L403	FRONT OF BUMPER TO BACK OF CAB	3450	3450	3469	3463
L404	CAB TO CENTERLINE OF REAR AXLE	492	492.6	492.6	490
LXXX	REAR OF BACK GLASS TO REAR OF CAB BACK HAT SECTION	44.4	44.4	44.4	44.4
L700	CENTERLINE OF FRONT AXLE TO BACK OF CAB	2584	2584	2584	2584
L705	CENTERLINE OF REAR AXLE TO REAR END OF FRAME	N/A (unibody construction)			
W703	FRAME RAIL WIDTH	N/A (unibody construction)			
W704	REAR FRAME WIDTH	N/A (unibody construction)			

CAB

CODE	DESCRIPTION	Crew Cab			
		Base FHEV	Full Content ICE		Tremor ICE
		225_65R17x7	225_65R17x7	225_65R17x7	235_65R17x7
		FWD	FWD	AWD	AWD
H701	FRONT BUMPER HEIGHT W/ VALENCES	424.4	424.4	423.6	439
W103	VEHICLE BODY WIDTH (MAX W/O MIRRORS)	1844	1844	1844	1844
W144	VEHICLE WIDTH (MAX W/ STANDARD MIRRORS)	2122	2122	2134	2122
W702 (W106)	FRONT BUMPER WIDTH	1814	1814	1814	1814

PICKUP BODY

CODE	DESCRIPTION	Crew Cab			
		Base FHEV	Full Content ICE		Tremor ICE
		225_65R17x7	225_65R17x7	225_65R17x7	235_65R17x7
		FWD	FWD	AWD	AWD
NOMINAL CARGO BODY SIZE		4.5 FT			
H704	TOP OF PICKUP BOX FLOOR (HIGHEST POINT) TO CL OF FUEL FILLER DOOR	335	335	335	335
H705	REAR BUMPER HEIGHT WITH TAILGATE CLOSED	294.9	294.9	294.9	283
H769	TOP OF PICKUP BOX FLOOR (HIGHEST POINT) TO TOP OF CAB @ CL OF REAR AXLE	962	962	962	962
L504	CAB TO PICKUP BOX	N/A (unibody construction)			
L551	BOX OVERALL LENGTH TO OPEN TAILGATE (MINIMUM)	1972.3	1972.3	1972.3	1972
L551a	BOX OVERALL LENGTH TO OPEN TAILGATE (MINIMUM)	2016.6	2016.6	2016.6	2016
L558	CENTERLINE OF REAR AXLE TO CENTERLINE OF FUEL FILLER DOOR	190.6	191.2	191.2	186
L559	LENGTH OF OPEN TAILGATE FRONT END OF BOX FLOOR SAME AS F150	629.6	629.6	629.6	629.6

MAVERICK
DIMENSIONAL DATA
PICKUP

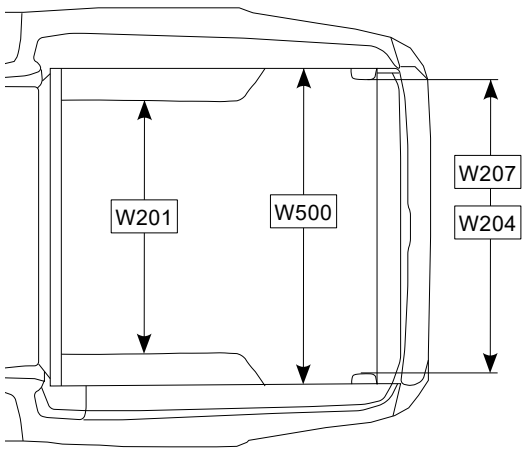

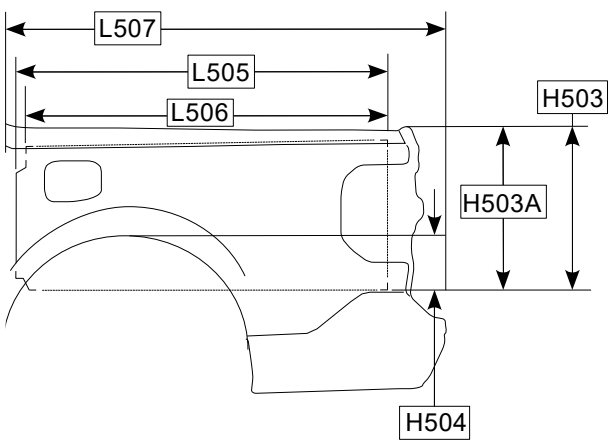

PICKUP BOX

CODE	DESCRIPTION	Crew Cab			
		Base FHEV	Full Content ICE		Tremor ICE
		225_65R17x7	225_65R17x7	225_65R17x7	235_65R17x7
		FWD	FWD	AWD	AWD
NOMINAL CARGO BODY SIZE		4.5 FT			
H503	CARGO BODY HEIGHT W/ MOLDING	516	516	516	516
H503A	CARGO BODY HEIGHT WITHOUT MOLDING @ CL OF REAR AXLE	500	500	500	500
H504	WHEELHOUSE HEIGHT WITH MOLDING	175	175	175	175
L505	CARGO BODY LENGTH @ FLOOR	1382	1382	1382	1382
L506	CARGO BODY L506 LENGTH @ TOP (BELT)	1350	1350	1350	1350
L507	CARGO BODY OVERALL LENGTH (INCLUDES TAILGATE HANDLE BEZEL & BADGE)	N/A (unibody construction)			
W201	CARGO WIDTH AT WHEELHOUSE	1082	1082	1082	1082
W204	REAR OPENING WIDTH @ TOP (BELT)	1264	1264	1264	1264
W207	REAR OPENING WIDTH AT FLOOR	1264	1264	1264	1264
W500	EXPOSED CARGO WIDTH	1353	1353	1353	1353
V5	CARGO VOLUME - LITERS	943	942.5	943	942.5

MAVERICK
DIMENSIONAL DATA

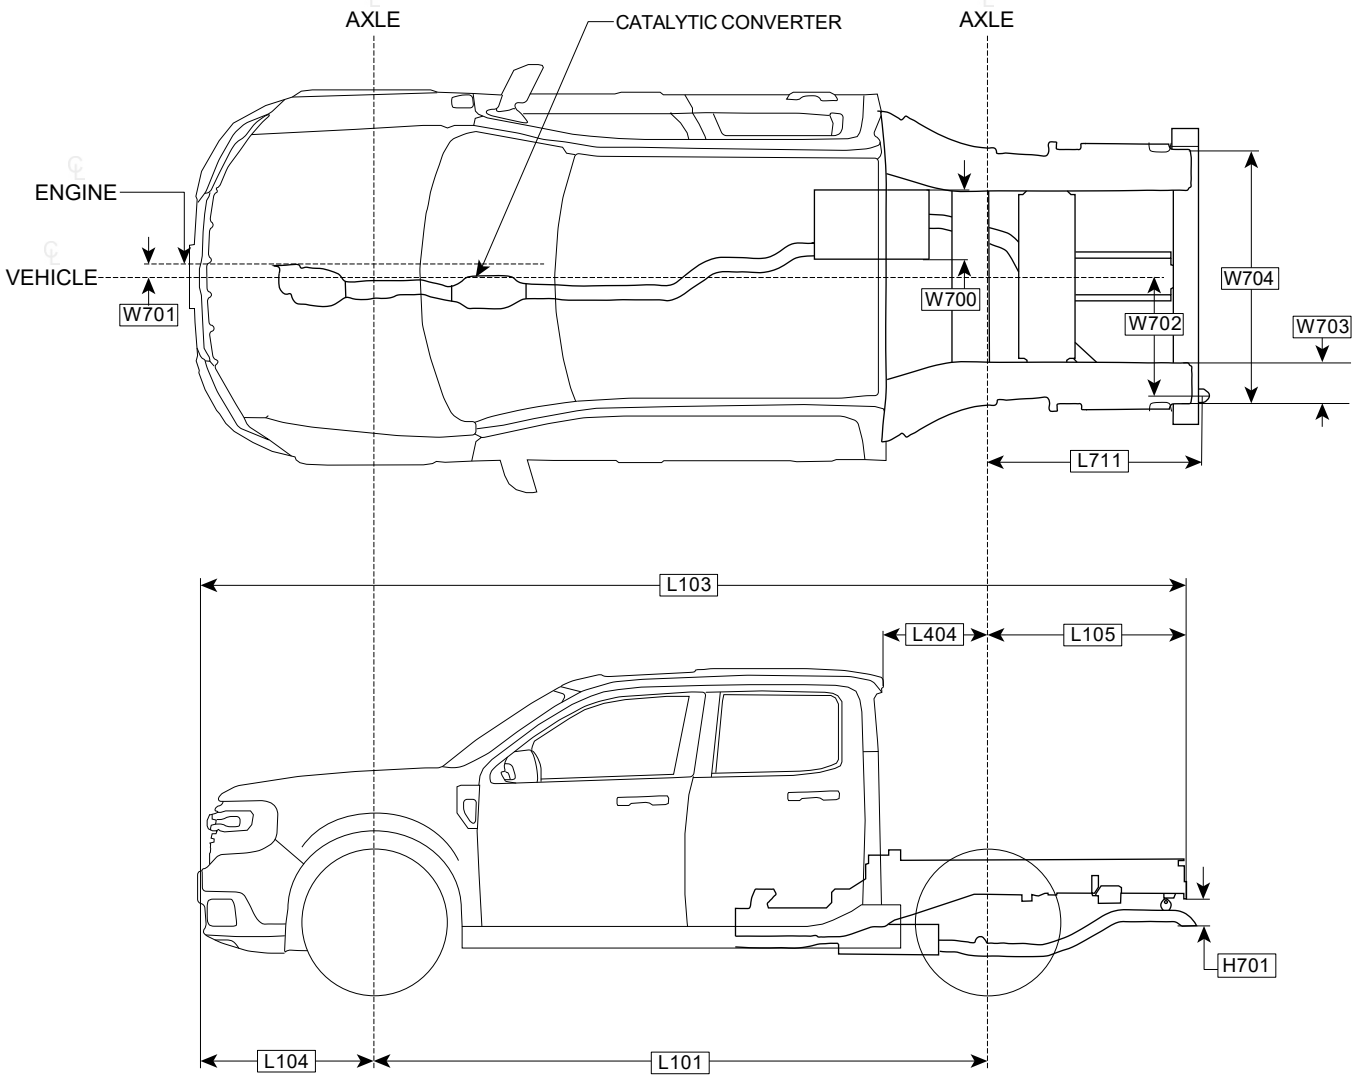

MAVERICK
DIMENSIONAL DATA

CODE	DESCRIPTION	UNITS	Base FHEV	Full Content ICE	Tremor ICE
			225_65R17x7	235_65R17x7	235_65R17x7
			FWD	AWD	AWD
L101	Wheel Base	mm	3076	3076	3075
L103	Vehicle Length	mm	5073	5110	5099
H101	Vehicle Height - Maximum	mm	1745	1744	1766
W103	Vehicle Width*	mm	1844	1844	1844
W116	Body Width - Maximum*	mm	1839	1839	1844
W144	Vehicle Width - Including Outside Mirrors	mm	2122	2134	2122
W145	Vehicle Width - with Mirrors Folded	mm	1979	1979	1979
W102-1	Vehicle Track Front Curb	mm	1611	1611	1603
W102-2	Vehicle Track Rear Curb	mm	1595	1595	1576
L104	Front Overhang	mm	866	890	878
L105	Rear Overhang	mm	1131	1144	1146
A106-1	Approach Angle	deg	20.6	21.6	30.7
A106-2	Departure Angle	deg	21.9	21.2	22.2
A147	Ramp Breakover Angle - Curb	deg	16.6	18.1	19.9
H156	Minimum Running Ground Clearance	mm	210	218	240
L403	Front of Bumper to Back of Cab	mm	3494	3513	3494

MAVERICK
AXLE / TIRE / VEHICLE HEIGHT DATA
CREW CAB

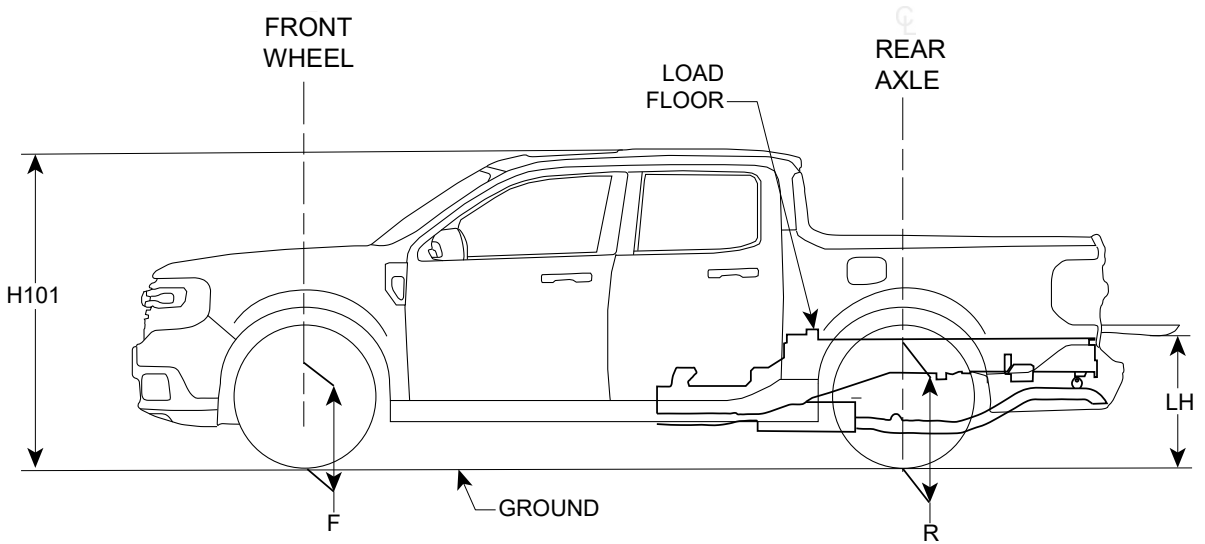

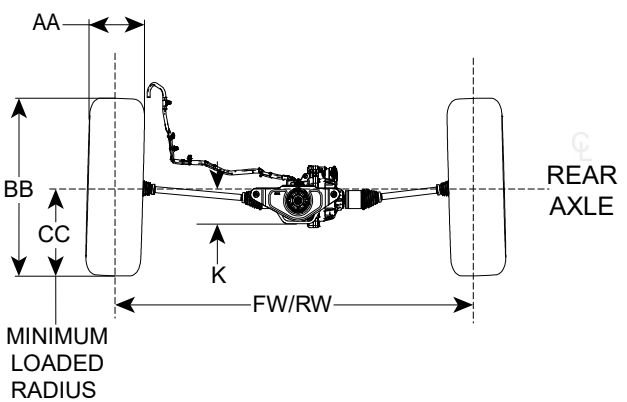

CODE	DESCRIPTION	Crew Cab			
		Base FHEV	Full Content ICE		Tremor ICE
		225_65R17x7	225_65R17x7	225_65R17x7	235_65R17x7
		FWD	FWD	AWD	AWD
H101	Vehicle Height - Maximum	1745	1723	1737	1766
W102-1	Vehicle Track Front Curb	1608.7	1608.7	1608.7	1603
W102-2	Vehicle Track Rear Curb	1593	1593	1584.8	1576

(1) The Height Data shown represents dimensions of a base/standard vehicle with no options.Actual height may vary due to production tolerances.
(2) Vehicle ride heights are given at tire minimum loaded radius.

MAVERICK
WHEEL & TIRE DATA

TIRE SPECIFICATION

Size	Part number	Type	Rim width (in.)	Section Width (mm)	SLR (mm)
225/65R17 Conti TX	M1PC-1508-DA	Road	7	225	330.1
225/65R17 Pirelli ATR	M1PC-1508-A1A	Road	7	225	318.9
235/65R17 Falken AT3W	M1PC-1508-C1A	Road	7	235	334.5
225/60R18 Michelin A/S	M1PC-1508-E1A	Road	7	225	333.2
215/60R17 Linglong	NZ6C-1508-A1A	Spare	7	215	315.5
T155/70D17 Maxxis	8A53-1508-CA	Spare	4	155	298

WHEEL SPECIFICATION

Wheel Style	Part number	Type	Wheel Size (in.)	Wheel Offset (in./mm)	Bolt circle (in./mm)	No. of studs	Lug Size	Max wheel capacity load Front (Kg)	Max wheel capacity load Rear (Kg)	Max wheel capacity load Front (lbf)	Max wheel capacity load Rear (lbf)
Sparkle Silver, Steel	NZ6C-1015-A1D	Road	17x7.0	1.476 / 37.5	4.25 / 107.95	5	14 mm	613	677	1352	1492
Carbonized Gray, Alloy	NZ6C-1007-B1A	Road	17x7.0	1.476 / 37.5	4.25 / 107.95	5	14 mm	613	681	1350	1500
Ebony Black / Machined, Alloy	NZ6C-1007-C1A	Road	18x7.0	1.476 / 37.5	4.25 / 107.95	5	14 mm	613	681	1350	1500
Ebony Black / Machined, Alloy	NZ6C-1007-D1A	Road	17x7.0	1.476 / 37.5	4.25 / 107.95	5	14 mm	613	681	1350	1500
Ebony Black, Alloy	NZ6C-1007-E1A	Road	18x7.0	1.476 / 37.5	4.25 / 107.95	5	14 mm	613	681	1350	1500
Carbonized Gray / Machined, Alloy	NZ6C-1007-F1A	Road	17x7.0	1.476 / 37.5	4.25 / 107.95	5	14 mm	613	681	1350	1500
Sparkle Silver, Steel	NZ6C-1015-A1D	Spare	17x7.0	1.476 / 37.5	4.25 / 107.95	5	14 mm	613	677	1352	1492
Black, Steel	HP5C-1015-A1B	Spare	17x4.0	0.984 / 25.0	4.25 / 107.95	5	14 mm	613	677	1351	1491

MAVERICK
ELECTRICAL ADAS FEATURES
RADAR AND CAMERA KEEP OUT ZONES

Installed equipment should not infringe on the radar or camera view zones.
The following CAD files are available upon request via the Ford BBAS system (www.fordbbas.com/contactus).

P758 F2 MY19 FRT CAMERA ZONE
P758 F2 MY19 FRT RADAR ZONE

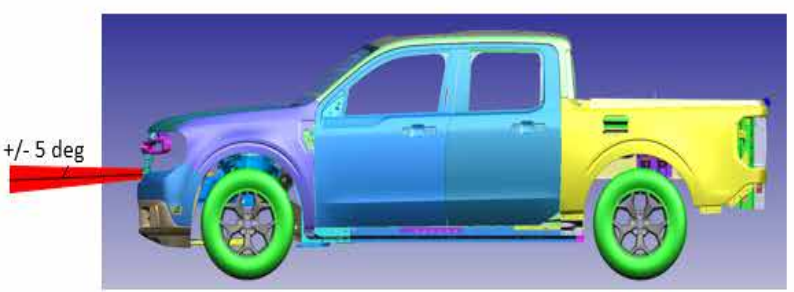

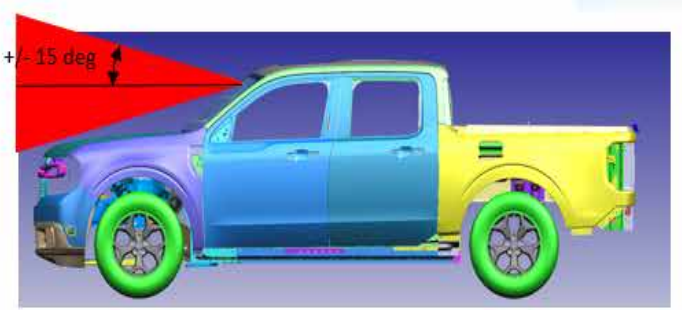

CHANGE CONTROL INDEX

LTRS	REVISIONS		
ORIGINATOR	CHECKER	ENGR APP	MATL APP
			INITIAL RELEASE
CHPZ64-000000-BBLB-AA-01-FNA-ECN/1			
RELEASED			20221012
SSAMAL	TNARESH	SLAZARZ	--